

CO800G

Addressable Carbon Monoxide Detector (IP54)




The CO800G is an analogue addressable Carbon Monoxide detector specifically designed for use with the Simplicity CO addressable carbon monoxide monitoring & ventilation panel.

The detector uses an electro-chemical sensor with the detection range of 0 to 600 ppm of carbon monoxide. The detectors address is set via a binary dipswitch on the rear of the detector.

The optimum mounting height for this detector is between 1.5 & 2m from the floor.

Model	CO800G
Part No	47-016
Operating Voltage	17-28 Vdc
Standby Current	500 μ A @ 24 Vdc
Operating Temperatures	-20°C to +60°C
Max Humidity	95% RH no condensation
Max Wind Speed	Not effected
Ingress Protection	IP54
Coverage	300m ²
Sensor / Range	Electro-chemical / 0-600 ppm
Sensor Lifetime	5 years maximum

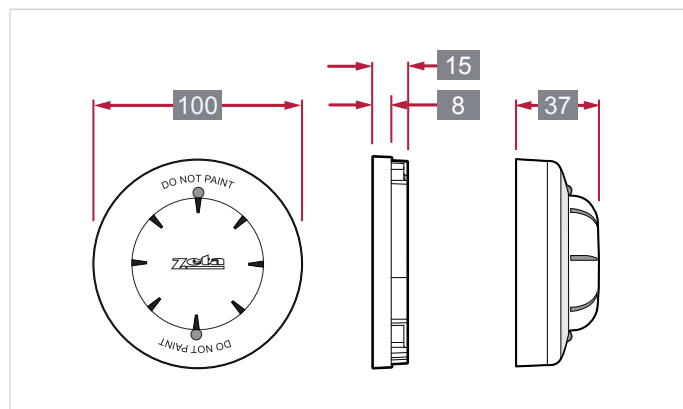

CoCheck - Test Cannister

In order to achieve safe testing of the CO detectors, the CoCheck canister with the compatible dispenser can introduce CO safely to the sensor from outside, demonstrating free flow from the atmosphere to the sensor.

The CO contained within the CoCheck canister is at a level which poses no threat to the user when used correctly.

