


CROOKSMOOR

CROOKSMOOR LED Emergency Bulkhead
with Self Test, IP65, Maintained/Non-
maintained, 3.2V LiFePO4 Battery, Self Test

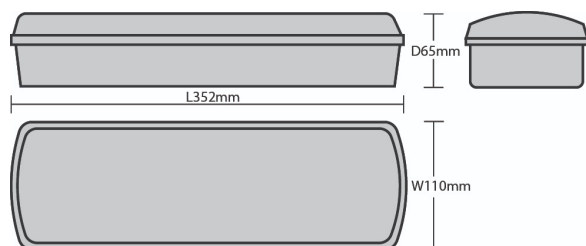

GENERAL DATA

Light Source	LED
Light Source Replaceable	No
Colour/Finish	White
Material	Polycarbonate
Diffuser Type	Prismatic
Diffuser Material	Polycarbonate
IP Rating	IP65
IK Rating	IK08
Mounting Type	Surface
Warranty (Years)	5
Life Time Hours	50000

DIMENSIONS & WEIGHT

Length (mm)	352
Width (mm)	110

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 19/11/25

Depth (mm)	65
Weight (g)	540

ELECTRICAL

Input Voltage (V)	220-240
Input Frequency (Hz)	50
Wattage (W)	5
Classification	Class I
Operating Temperature (°C)	0 to +40
Power Factor	0.34

OPTICAL

Colour Temperature	6500
CRI	70
Beam Angle (°)	117
Lumen Output Mains (lm)	350
Viewing Distance (M)	19

EMERGENCY

Battery Type	LiFePO4 18650 3.2V
Battery Capacity	1.5Ah
Battery Warranty (Years)	5
Recharge Time (hrs)	24
Battery Replaceable	Yes
Mode of Operation	Maintained / Non-maintained
Test Procedure	Self Test
Emergency Duration (hrs)	3
Lumen Output Emergency (lm)	138

STANDARDS & APPROVALS

Manufactured in Accordance with	BS EN 60598-1, BS EN 60598-2-22, BS EN 50172
CE Mark	Yes
UKCA Mark	Yes
WEEE Symbol	Yes
Accredited Members	ISO 9001, LIA, ICEL

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 19/11/25

PACKAGING

Packaging Length (mm)	358
Packaging Width (mm)	115
Packaging Depth (mm)	72

Spacing Tables

ESCAPE ROUTE 2 METRES WIDE (1 LUX MIN)				
				
Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5m	2.5	8	2.7	7
3.0m	2.6	7.8	2.7	7.5
4.0m	2.3	7.8	2.5	7.6

OPEN (ANTI-PANIC) AREA (0.5 LUX MINIMUM)				
				
Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5m	3.7	10.5	3.5	8.7
3.0m	3.7	11.1	3.7	9.4
4.0m	3.7	11.2	3.9	10.4

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
 T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 19/11/25