


ELLESMERE

ELLESMERE LED Non-Corrosive Fitting, IP65,
230V Mains, 4 FT, Wattage Selectable,
23W/29W/34W/40W

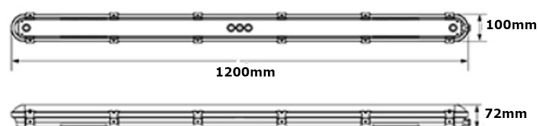

GENERAL DATA

Light Source	LED
Light Source Replaceable	No
Colour/Finish	Grey
Material	Polycarbonate
Diffuser Type	Opal
Diffuser Material	Polycarbonate
IP Rating	IP65
IK Rating	IK08
Mounting Type	Surface
Warranty (Years)	5
Life Time Hours	50,000

DIMENSIONS & WEIGHT

Length (mm)	1200
-------------	------

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 18/11/25

Width (mm)	100
Depth (mm)	72
Weight (g)	1250

ELECTRICAL

Input Voltage (V)	220-240
Input Frequency (Hz)	50
Wattage (W)	23W/29W/34W/40W
Classification	Class I
Operating Temperature (°C)	-10 to +40
Power Factor	0.9

OPTICAL

Colour Temperature	3CCT
CRI	80
Beam Angle (°)	120
Lumen Output Mains (lm)	2760/3480/4080/4800lm (at 4000K)

STANDARDS & APPROVALS

Manufactured in Accordance with	BS EN 60598-1
CE Mark	Yes
UKCA Mark	Yes
WEEE Symbol	Yes
Accredited Members	ISO 9001, ISO 14001

PACKAGING

Packaging Length (mm)	1210
Packaging Width (mm)	105
Packaging Depth (mm)	75

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 18/11/25