

FLANGED DAMPER

ELTA

>> **Select** models available for next day delivery




FLANGED DAMPER



Overview

- Prevents reverse flow of air when fan is not operating
- Fixed directly to fan case flange
- Hot dip galvanised steel
- Galvanised steel butterfly type blades
- Suitable for horizontal or vertical (upward airflow) mounting

Product Code	Fan Dia. A	B	C	D	E	G	H	J	Weight kg
019-0250-STD	250	306	170	170	1.6	8	10	280	7.0
019-0315-STD	315	375	180	210	2.0	8	10	355	7.5
019-0355-STD	350	425	185	235	3.0	8	10	395	8.0
019-0400-STD	400	475	220	270	3.0	8	12	450	9.0
019-0450-STD	450	530	220	280	3.0	8	12	500	12.0
019-0500-STD	500	585	220	315	3.0	12	12	560	18.0
019-0560-STD	560	645	220	375	3.0	12	12	620	21.0
019-0630-STD	630	715	250	420	3.0	12	12	690	25.0
019-0710-STD	710	795	250	740	3.0	16	12	770	29.0
019-0800-STD	800	885	300	525	3.0	16	12	860	34.0
019-0900-STD	900	1000	300	590	4.0	16	15	970	59.0
019-1000-STD	1000	1100	420	646	4.0	16	15	1070	85.5

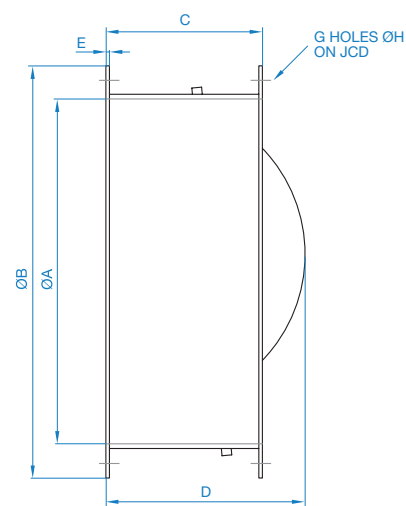

Dimensions are in mm.

FLANGED DAMPER

Notes

[illegible]

Tel **+44 (0) 1384 275800**
Email **info@eltauk.com**
eltauk.com

019-STD-03-2018 Issue A



BS EN ISO 9001:2015 FM 556465



A member of
HEVAC ASSOCIATION



A MEMBER OF  ELTA
GROUP