


NORFOLK

NORFOLK LED Emergency Bulkhead, IP65, Maintained/Non-maintained, 3.2V LiFePO4 Battery

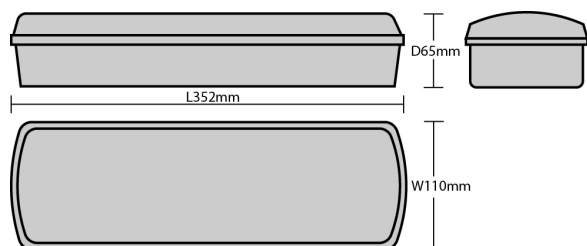

GENERAL DATA

Light Source	SMD LED
Light Source Replaceable	No
Colour/Finish	White
Material	Polycarbonate
Diffuser Type	Prismatic
Diffuser Material	Polycarbonate
IP Rating	IP65
IK Rating	IK08
Mounting Type	Surface
Warranty (Years)	5
Life Time Hours	50,000

DIMENSIONS & WEIGHT

Length (mm)	352
-------------	-----

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 19/11/25

Width (mm)	110
------------	-----

Depth (mm)	65
------------	----

Weight (g)	490
------------	-----

ELECTRICAL

Input Voltage (V)	220-240
-------------------	---------

Input Frequency (Hz)	50
----------------------	----

Wattage (W)	3
-------------	---

Classification	Class I
----------------	---------

Operating Temperature (°C)	0 to +40
----------------------------	----------

Power Factor	0.35
--------------	------

OPTICAL

Colour Temperature	6500K
--------------------	-------

CRI	70
-----	----

Beam Angle (°)	125
----------------	-----

Lumen Output Mains (lm)	350
-------------------------	-----

Viewing Distance (M)	19
----------------------	----

EMERGENCY

Battery Type	LiFePO4 18650 3.2V
--------------	--------------------

Battery Capacity	1.5Ah
------------------	-------

Battery Warranty (Years)	5
--------------------------	---

Recharge Time (hrs)	24
---------------------	----

Battery Replaceable	Yes
---------------------	-----

Mode Of Operation	Maintained / Non-maintained
-------------------	-----------------------------

Test Procedure	Manual
----------------	--------

Emergency Duration (Hrs)	3
--------------------------	---

Lumen Output Emergency (lm)	200
-----------------------------	-----

STANDARDS & APPROVALS

Manufactured in Accordance with	BS EN 60598-1, BS EN 60598-2-22
---------------------------------	---------------------------------

CE Mark	Yes
---------	-----

UKCA Mark	Yes
-----------	-----

WEEE Symbol	Yes
-------------	-----

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 19/11/25

Accredited Members

ISO 9001, ISO 14001

PACKAGING

Packaging Length (mm) 358

Packaging Width (mm) 115

Packaging Depth (mm) 72

Spacing Tables

ESCAPE ROUTE 2 METRES WIDE (1 LUX MIN)				
				
Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5m	1.8	5.5	2.7	7.3
3.0m	1.8	5.6	2.9	7.5
4.0m	0.8	5.2	2.3	7.8

OPEN (ANTI-PANIC) AREA (0.5 LUX MINIMUM)				
				
Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5m	2.7	6.9	4.2	9.9
3.0m	2.7	7.4	3.8	10.4
4.0m	2.6	7.9	3.9	10.6

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
 T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 19/11/25