


PARSON

PARSON Dali Multi-Installation Emergency Exit Sign, IP20, Maintained / Non-maintained, LiFePO4

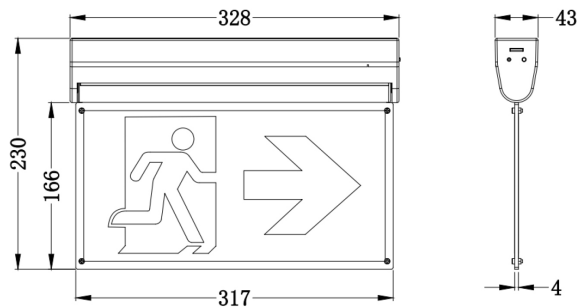

GENERAL DATA

Light Source	LED
Light Source Replaceable	No
Colour/Finish	White RAL9016
Material	Polycarbonate
IP Rating	IP20
IK Rating	IK06
Mounting Type	Ceiling / Wall Mount
Warranty (Years)	5
Life Time Hours	50,000

DIMENSIONS & WEIGHT

Length (mm)	328
Width (mm)	230
Depth (mm)	43
Weight (g)	650

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 19/11/25

ELECTRICAL

Input Voltage (V)	220-240
Input Frequency (Hz)	50
Wattage (W)	3
Classification	Class II
Operating Temperature (°C)	0 to +45
Power Factor	>0.3

OPTICAL

Colour Temperature	6000K
CRI	>80
Beam Angle (°)	130
Lumen Output Mains (lm)	18lm
Viewing Distance (M)	30M

EMERGENCY

Battery Type	LiFePO4 3.2V
Battery Capacity	1.5Ah
Battery Warranty (Years)	5
Recharge Time (hrs)	24
Battery Replaceable	No
Mode Of Operation	Maintained / Non-maintained
Test Procedure	Dali
Emergency Duration (Hrs)	3
Lumen Output Emergency (lm)	18

STANDARDS & APPROVALS

Manufactured in Accordance with	BS EN 60598-1, BS EN 60598-2-22
CE Mark	Yes
UKCA Mark	Yes
WEEE Symbol	Yes
Accredited Members	ISO 9001, ISO 14001

BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 19/11/25