


# RIVELIN

RIVELIN Dali Emergency Bulkhead, IP65,  
Maintained / Non-maintained, LiFePO4, 6W

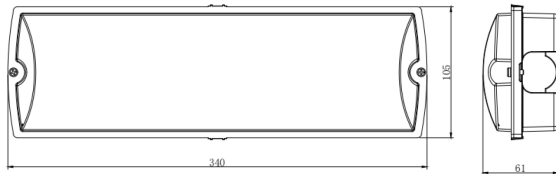

## GENERAL DATA

|                          |               |
|--------------------------|---------------|
| Light Source             | LED           |
| Light Source Replaceable | No            |
| Colour/Finish            | White RAL9016 |
| Material                 | Polycarbonate |
| Diffuser Type            | Prismatic     |
| Diffuser Material        | Polycarbonate |
| IP Rating                | IP65          |
| IK Rating                | IK08          |
| Mounting Type            | Surface       |
| Warranty (Years)         | 5             |
| Life Time Hours          | 50,000        |

## DIMENSIONS & WEIGHT

|             |     |
|-------------|-----|
| Length (mm) | 340 |
| Width (mm)  | 105 |
| Depth (mm)  | 61  |

### BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT  
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 19/11/25

|            |     |
|------------|-----|
| Weight (g) | 620 |
|------------|-----|

## ELECTRICAL

|                   |         |
|-------------------|---------|
| Input Voltage (V) | 220-240 |
|-------------------|---------|

|                      |    |
|----------------------|----|
| Input Frequency (Hz) | 50 |
|----------------------|----|

|             |    |
|-------------|----|
| Wattage (W) | 6W |
|-------------|----|

|                |          |
|----------------|----------|
| Classification | Class II |
|----------------|----------|

|                            |          |
|----------------------------|----------|
| Operating Temperature (°C) | 0 to +45 |
|----------------------------|----------|

|              |     |
|--------------|-----|
| Power Factor | 0.3 |
|--------------|-----|

## OPTICAL

|                    |       |
|--------------------|-------|
| Colour Temperature | 5000K |
|--------------------|-------|

|     |     |
|-----|-----|
| CRI | >80 |
|-----|-----|

|                |     |
|----------------|-----|
| Beam Angle (°) | 120 |
|----------------|-----|

|                         |       |
|-------------------------|-------|
| Lumen Output Mains (lm) | 220lm |
|-------------------------|-------|

## EMERGENCY

|              |              |
|--------------|--------------|
| Battery Type | LiFePO4 6.4V |
|--------------|--------------|

|                  |       |
|------------------|-------|
| Battery Capacity | 1.5Ah |
|------------------|-------|

|                          |   |
|--------------------------|---|
| Battery Warranty (Years) | 5 |
|--------------------------|---|

|                     |    |
|---------------------|----|
| Recharge Time (hrs) | 24 |
|---------------------|----|

|                     |    |
|---------------------|----|
| Battery Replaceable | No |
|---------------------|----|

|                   |                             |
|-------------------|-----------------------------|
| Mode Of Operation | Maintained / Non-maintained |
|-------------------|-----------------------------|

|                |      |
|----------------|------|
| Test Procedure | Dali |
|----------------|------|

|                          |   |
|--------------------------|---|
| Emergency Duration (Hrs) | 3 |
|--------------------------|---|

|                             |       |
|-----------------------------|-------|
| Lumen Output Emergency (lm) | 220lm |
|-----------------------------|-------|

## STANDARDS & APPROVALS

|                                 |                                 |
|---------------------------------|---------------------------------|
| Manufactured in Accordance with | BS EN 60598-1, BS EN 60598-2-22 |
|---------------------------------|---------------------------------|

|         |     |
|---------|-----|
| CE Mark | Yes |
|---------|-----|

|           |     |
|-----------|-----|
| UKCA Mark | Yes |
|-----------|-----|

|             |     |
|-------------|-----|
| WEEE Symbol | Yes |
|-------------|-----|

|                    |                     |
|--------------------|---------------------|
| Accredited Members | ISO 9001, ISO 14001 |
|--------------------|---------------------|

### BLE LIGHTING AND POWER LTD

Unit 3, Drake Business Park, Drake House Crescent, Sheffield, S20 7HT  
T: 01246 432325, E: sales@blelighting.co.uk, W: www.blelighting.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 19/11/25